

FKM 350 PD SUPER




FKM 350 PD SUPER

SPECIFICATIONS

sizes of worktable	800 x 240 mm
working area	730 x 210 mm
movement longitudinal X	500 mm
movement cross Y	230 mm
height adjustment milling head	350 mm
spindle speeds	75-3200 U/min
tool mounts	ISO 40 / SK 40
quill stroke	130 mm
drilling capacity in steel	40 mm
milling Head swiveling	+ -90°
distance spindle nose - column	290 mm
distance spindle nose - work table	max 445 mm
Machine height with raised milling head max.	1450 mm
size of t-slots	14 mm (M12)
power of engine	1.1/1.5 KW 400 Volt
weight	350,00 kg
dimensions	1020 x 860 x 1150 mm

EQUIPMENT

- » digital depth indicator
- » adjustable guide ways by Gibs
- » big 12 steps speed range of 75 - 3200 U/min
- » high smooth running by hardened and ground gears in in Oil running forward/backward motor rotation
- » Transmission ventilation
- » prism guideways in all axis
- » gear head 90° swivel-mounted with Stop block and Nonius
- » chip protection with safety circuit

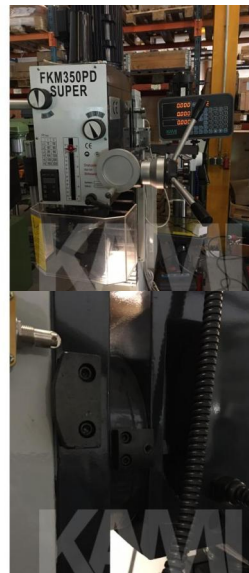

ACCESSOIRES

Cover for Guideway for Y + Z-axis, ISO 40 drill chuck arbor, drill chuck, ditiale depth indicator, threading attachment, 3-axis digital measurement system ready mounted, automatic stepless feed in X - axis, Motorized Milling head stroke, Stop block for 90° Position of the milling head, Handwheels Full Metal, working lamp 24V, german manual.

OPTIONAL ACCESSORY

- » other tools cooling device K45
- » Clamping tool kit T14
- » reduction sleeve SK40 to MK3
- » drilling accessories keyless drill chuck B16, 1-13mm
- » drilling accessories keyless drill chuck B18 3-16mm
- ...