


## 4-B lathe chuck D=125, DIN6350, cast iron

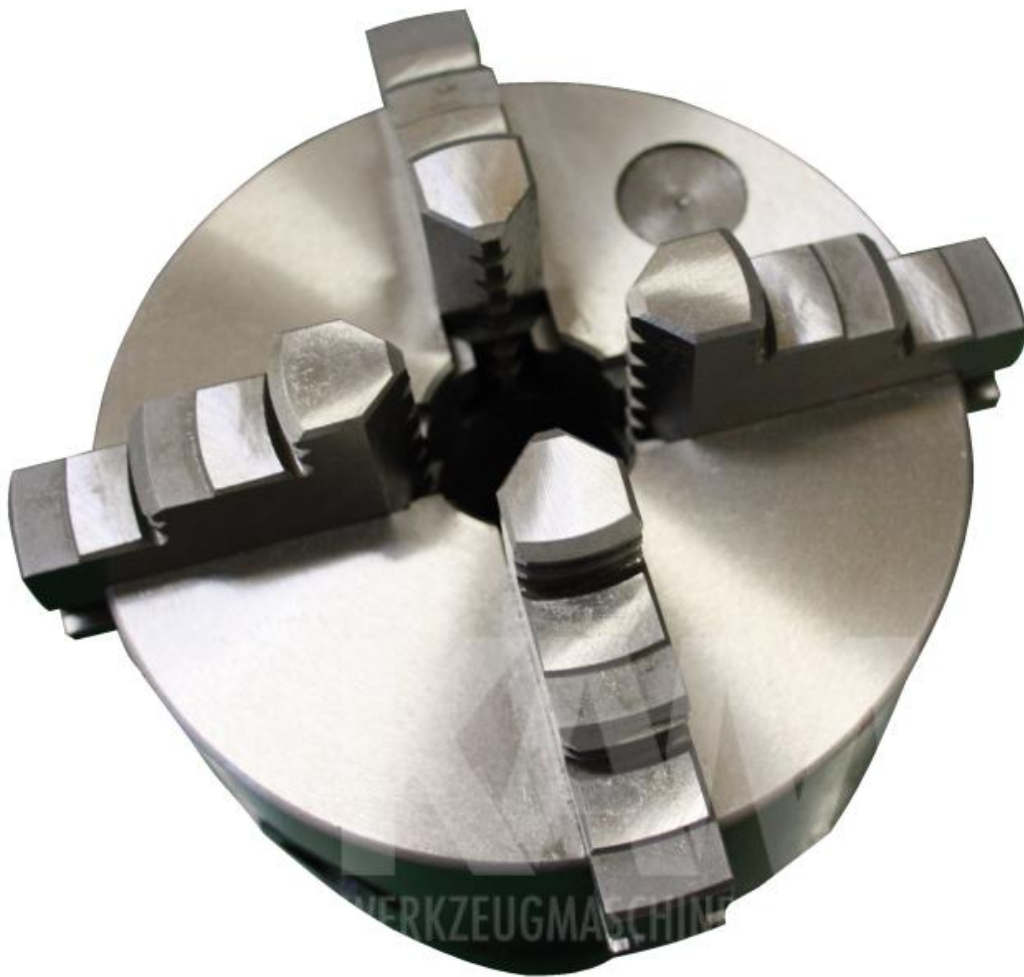

**LATHE CHUCK**

# 4-B lathe chuck D=125, DIN6350, cast iron

## SPECIFICATIONS

<b>diameter</b>	125 mm
<b>fixing</b>	3 St. M 8
<b>pitch circle</b>	108 mm
<b>centering margin</b>	95 mm
<b>opening dimensions</b>	30 mm
<b>width over all</b>	84,5 mm
<b>chuck body</b>	58 mm
<b>max. speed</b>	3000 U/min
<b>weight</b>	9,00 kg



**DIN 6350  
PLAIN BACK**

SIZE D	D1	D2	D3	H1	h	Z-d	
						Back mounting	Front mounting
80	56	67	16	50	4	3-M8	3-M8
100	70	83	22	55	3	3-M8	3-M8
125	95	108	30	58	4	3-M8	3-M8
160	125	140	45	65	5	6-M10	3-M10
200	160	176	65	75	5	6-M10	3-M10
250	200	224	80	80	5	6-M12	3-M12
315	260	286	100	90	6	6-M16	3-M16
400	330	362	130	100	6	6-M16	3-M16
500	420	458	210	115	6	6-M16	-
630	545	586	252	135	7	6-M16	-

## ACCESSORIES

cylindrical taper according DIN 6350 , one-piece jaws  
 These lathe chucks ensure uniform clamping force due to centrally exciting jaws and high concentricity.