


DKM 630.3 W

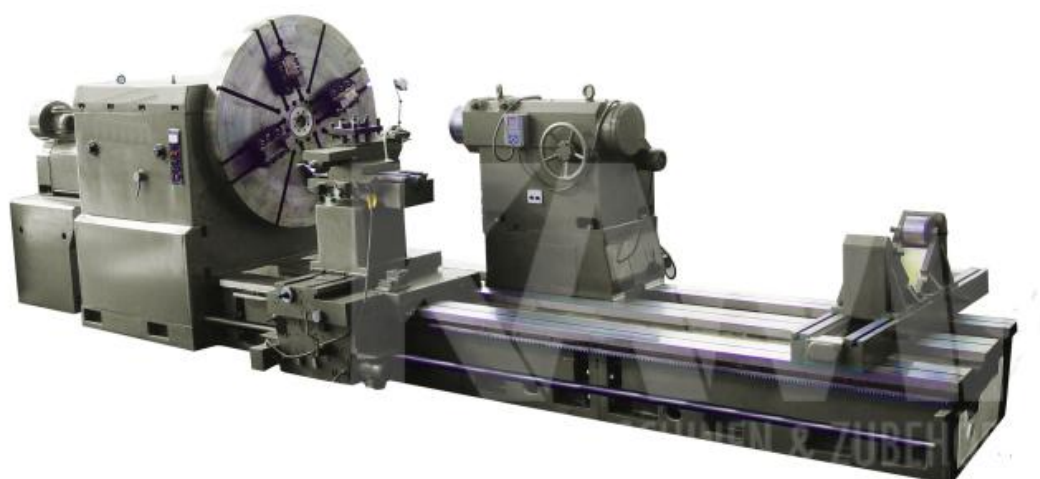

DKM 630.3 W

SPECIFICATIONS

height of center	315 mm
distance between center	3200 mm
bed width	1020 mm
machining length	3200 mm
max. swing over bed	630 mm
guideways	3
max. workpiece weight	6,0 to optional 8 to
diameter of spindlehole	50 mm
speed range	1 - 73 U/min; 16 steps
Toolshaft Size max.	80 x 25 mm
Swivel range of toolholder	+ - 90°
travel of Top Slider	360 mm
quick feed cross	1500 mm/min
rapid feed longitudinal	3600 mm/min
quill diameter	180 optional 200 mm
quill konus	metric 65;1:7
power of engine	18,5 KW
weight	14.125,00 kg
dimensions	6750 x 1580 x 1650 mm

EQUIPMENT

- » bed width 1020 mm
- » gears diagonally dovetailed , hardend and ground
- » lubrication by integrated pump
- » adjustable main spindle bearing
- » rapid feed in longitudinal and cross
- » overload clutch in apron
- » digital readout
- » Optional with splash guard