


# DKM 1000.2S CNC

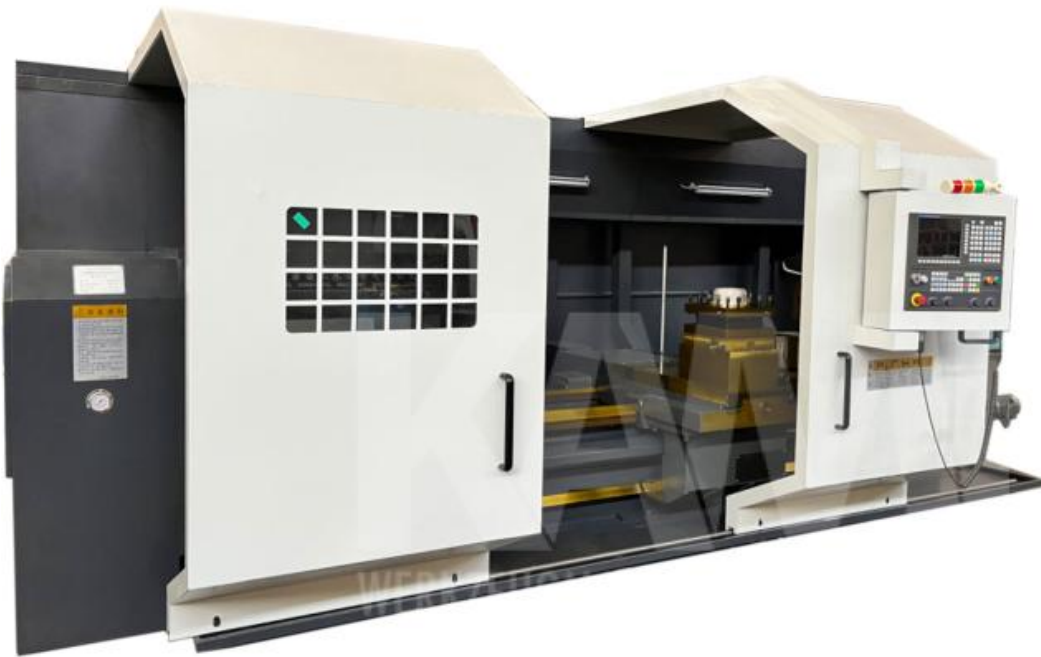

# DKM 1000.2S CNC

## SPECIFICATIONS

<b>height of center</b>	500 mm
<b>distance between center</b>	2000 mm
<b>bed width</b>	780 mm
<b>max. swing over bed</b>	1000 mm
<b>max. swing over slider</b>	590 mm
<b>max. weight of workpiece without Rest</b>	8000 Kg
<b>diameter of spindlehole</b>	130 mm
<b>spindlenose</b>	A 215/8xM22
<b>max. torque</b>	11000 Nm
<b>speed range</b>	3.15 - 315 U/min
<b>range longitudinal feeds</b>	stepless
<b>range cross feeds</b>	stepless
<b>quill diameter</b>	160 mm
<b>quill stroke</b>	300 mm
<b>quill konus</b>	morse cone 6
<b>power of engine</b>	22 KW
<b>weight</b>	11.200,00 kg
<b>dimensions</b>	4100 x 2150 x 2150 mm

## EQUIPMENT

- » Siemens 828D
- » Motorized tailstock
- » 4-position tool changer
- » full cabin with 2 Movable doors
- » 1 piece electrical Handle wheel
- » Boring Bar Holder



## ACCESSORIES

4-jaw independent chuck 1000mm, following rest with clamping range 200-600 mm, Siemens 828D  
Optional: rollbock